

RUTA DL 140-830
Art. No. 5131211111



A recessed **LED** downlight.

Application: **Office, Corridor, Lobbies, Shops**

Suitable for mounting in ceiling thicknesses of 10-40mm.



Dimensions (mm): Ø220 x 94 (LxWxH/DxH (mm) (1535 x 63 x 67)	Light Source: LED
Total power (W): 14.2	LED service life (h, L80 at 25°C): 50000
Luminaire luminous flux (lm): 1300	Electronic driver (1 pcs.): Included, external / internal
Luminaire efficacy (lm/W): 92	DALI: YES/ NO
Colour Rendering Index (CRI): 80	Dimming: YES/ NO
Correlated colour temperature (K): 3000	Mains voltage: 230V / 50Hz
Weight (kg): 0.76	High surge protection (kV): 2
Optics: NO	Cut-out (mm): 20
Cover: Prismatic	Protection class: IP20
Material Housing: Powder painted aluminum	

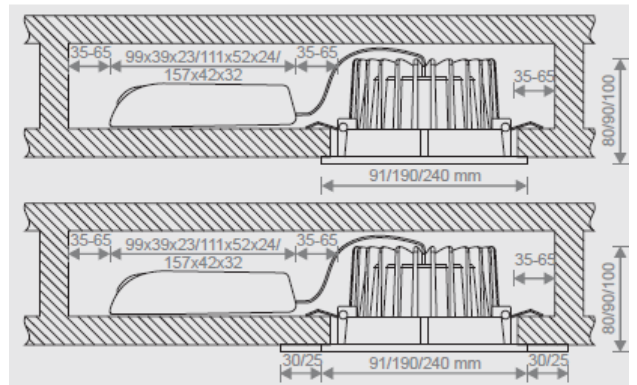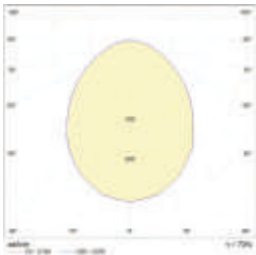

www.LTUlighting.lt

LTU Lighting is constantly developing and improving its products. The Company reserves the right to change any product specifications without prior notification.