

## DATASHEET

### L60 840 Art. No. 1231311111

LED pendant lighting L

High & Low-bay lighting, indoor / outdoor


Application: High&low-bay, Freezer, Industrial areas,  
Parking house, Tunnel




### Product data

Dimensions: LxWxH/DxH (mm)	620x59x62	Light Source:	LED
Total power (W):	25	LED service life (h, L80 at 25°C):	70000
Luminaire luminous flux (lm):	4375	Electronic driver (1 pcs.):	Included, integrated
Luminaire efficacy (lm/W):	175	DALI:	NO
Colour Rendering Index (CRI):	80	Dimming:	NO
Correlated colour temperature (K):	4000	Mains voltage:	230V / 50Hz
Weight (kg):	1,5	High surge protection (kV):	2
Optics:	No	Protection class:	IP65
Cover:	Prismatic	Operating temperature range:	-40 to +35°C
Material Housing:	Anodized aluminum	Certification	CE, ENEC (pending)

### Photometric data

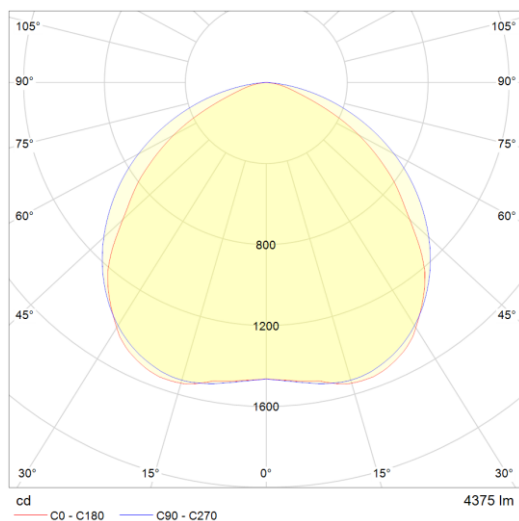

### Dimensional drawing

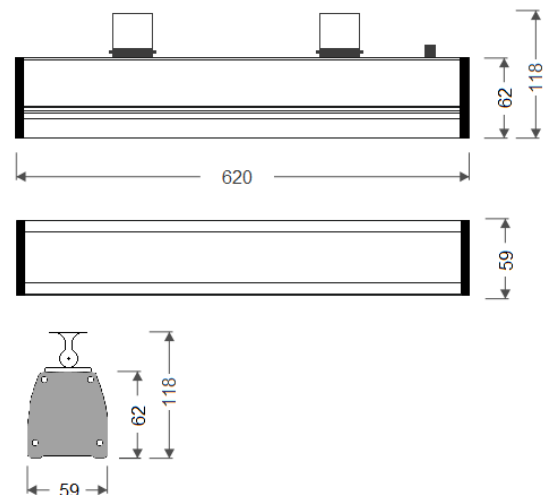

[www.LTUlighting.it](http://www.LTUlighting.it)

LTU Lighting is constantly developing and improving its products. The Company reserves the right to change any product specifications without prior notification.